



SINGLEGATES

Trelleborg Singlegates are grommets with various designs based on IP rating and application. These grommets can be used to lead through both low and medium voltage power cables, tubes and hoses. There are options that match the cut-outs that are based on PG dimensions, as well as on mm dimensions.

Singlegates are made of various types of polymers that are RoHS compliant and have excellent weather resistance. Also fire retardant and oil resistant models are available.



Grommets with IP54 classification

- Available both for PG and mm openings.
- UL94V-0 fire retardant material.
- For cable diameters between 9-69 mm

Grommets with IP67 classification

- Provides very high protection against dust and water
- Available in various materials and colours
- For cable diameters between 3-60mm



Packing size

Item	Packing size
Singlegate GET 3-5	50
Singlegate GET 5-7	50
Singlegate GET 7-10	50
Singlegate GET 10-14	50
Singlegate GET 14-20	25
Singlegate GET 20-26	25
Singlegate GET 26-35	10
Singlegate GET 30-45	5
Singlegate GET 40-60	5

Item	Packing size
Singlegate VET 3-5	50
Singlegate VET 5-7	50
Singlegate VET 8-14	50
Singlegate VET 7-10	50
Singlegate VET 10-14	50
Singlegate VET 14-20	25
Singlegate VET 20-26	25
Singlegate VET 26-35	10
Singlegate GET 40-60	5



T-VET




Advantages

- Fast and easy assembly
- Double sealing with high IP protection
- Suitable for both indoor and outdoor use
- Fit PG cut-out dimensions

Technical Specifications

- IP rating: IP67
- Material: thermoplastic elastomer
- Colour: grey and black
- Self-extinguishing option available
- Material service temperature (unstressed): -40 °C...+100 °C

Dimensions

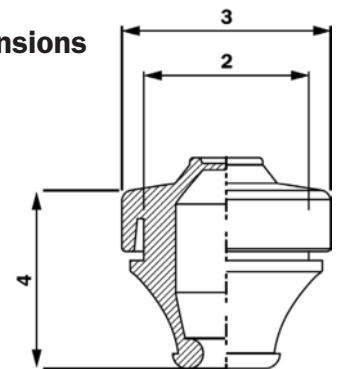

T-VET

Singlegates

Bulk
packed

Art.No.	Description	Packing code	Box size	Material Properties	Cable diameter	2	3	4	Plate thickness	Weight (g)
100744	T-VET 3-5 GREY	●	1 800	halogen-free	3mm - 5mm	13	20	17	1mm - 4mm	4
100746	T-VET 3-5 GREY UL94 V-0	●	1 800	UL94 V-0, self-extinguishing	3mm - 5mm	13	20	17	1mm - 4mm	4
100747	T-VET 3-5 BLACK UL94 V-0	●	1 800	UL94 V-0, self-extinguishing	3mm - 5mm	13	20	17	1mm - 4mm	4
100186	T-VET 5-7 GREY	●	1 500	halogen-free	5mm - 7mm	16	20	19	1mm - 4mm	4
100749	T-VET 5-7 GREY UL94 V-0	●	1 500	UL94 V-0, self-extinguishing	5mm - 7mm	16	20	19	1mm - 4mm	4
100187	T-VET 5-7 BLACK UL94 V-0	●	1 500	UL94 V-0, self-extinguishing	5mm - 7mm	16	20	19	1mm - 4mm	4
100465	T-VET 7-10 GREY	●	1 200	halogen-free	7mm - 10mm	19	24	21	1mm - 4mm	5
100751	T-VET 7-10 GREY UL94 V-0	●	1 200	UL94 V-0, self-extinguishing	7mm - 10mm	19	24	21	1mm - 4mm	5
100188	T-VET 7-10 BLACK UL94 V-0	●	1 200	UL94 V-0, self-extinguishing	7mm - 10mm	19	24	21	1mm - 4mm	5
100189	T-VET 10-14 GREY	●	700	halogen-free	10mm - 14mm	24	30	23	1mm - 4mm	8
100190	T-VET 10-14 GREY UL94 V-0	●	700	UL94 V-0, self-extinguishing	10mm - 14mm	24	30	23	1mm - 4mm	8
100191	T-VET 10-14 BLACK UL94 V-0	●	700	UL94 V-0, self-extinguishing	10mm - 14mm	24	30	23	1mm - 4mm	8
100753	T-VET 14-20 GREY	●	400	halogen-free	14mm - 20mm	29	34	26	1mm - 4mm	9
100192	T-VET 14-20 GREY UL94 V-0	●	400	UL94 V-0, self-extinguishing	14mm - 20mm	29	34	26	1mm - 4mm	9
100193	T-VET 14-20 BLACK UL94 V-0	●	400	UL94 V-0, self-extinguishing	14mm - 20mm	29	34	26	1mm - 4mm	9
100194	T-VET 20-26 GREY	●	250	halogen-free	20mm - 26mm	38	46	30	1mm - 4mm	18
100755	T-VET 20-26 GREY UL94 V-0	●	250	UL94 V-0, self-extinguishing	20mm - 26mm	38	46	30	1mm - 4mm	18
100195	T-VET 20-26 BLACK UL94 V-0	●	250	UL94 V-0, self-extinguishing	20mm - 26mm	38	46	30	1mm - 4mm	18
100196	T-VET 26-35 GREY	●	120	halogen-free	26mm - 35mm	48	58	33	1mm - 4mm	28
100197	T-VET 26-35 GREY UL94 V-0	●	120	UL94 V-0, self-extinguishing	26mm - 35mm	48	58	33	1mm - 4mm	28
100198	T-VET 26-35 BLACK UL94 V-0	●	120	UL94 V-0, self-extinguishing	26mm - 35mm	48	58	33	1mm - 4mm	28

VET




Advantages

- Fast and easy assembly
- Double sealing with high IP protection
- Suitable for both indoor and outdoor use
- Fit PG cut-out dimensions

Technical Specifications

- IP rating: IP67
- Material: EPDM rubber
- Colour: grey and black
- Material service temperature (unstressed): -40 °C...+100 °C

Dimensions



VET

Singlegates

B

Single
packed

Art.No.	Description	Packing code	Box size	Material Properties	Cable diameter	2	3	4	Plate thickness	Weight (g)
100715B	VET 3-5 BLACK EPDM	●	1 000	halogen-free	3mm - 5mm	13,2	20	12,8	1mm - 4mm	3
100716B	VET 3-5 GREY EPDM	●	1 000	halogen-free	3mm - 5mm	13,2	20	12,8	1mm - 4mm	3
104010B	VET 3-5 GREY EPDM	●	1 000	halogen-free	3mm - 5mm	13,2	20	12,8	1mm - 4mm	3
100306B	VET 5-7 BLACK EPDM	●	1 000	halogen-free	5mm - 7mm	16	20	20	1mm - 4mm	3
100307B	VET 5-7 GREY EPDM	●	1 000	halogen-free	5mm - 7mm	16	20	20	1mm - 4mm	3
100308B	VET 5-7 GREY EPDM	●	1 000	halogen-free	5mm - 7mm	16	20	20	1mm - 4mm	3
100291B	VET 8-14 BLACK EPDM	●	1 000	halogen-free	8mm - 14mm	23	28	23,5	1mm - 4mm	6
100292B	VET 8-14 GREY EPDM	●	1 000	halogen-free	8mm - 14mm	23	28	23,5	1mm - 4mm	7
100702B	VET 8-14 GREY EPDM	●	1 000	halogen-free	8mm - 14mm	23	28	23,5	1mm - 4mm	7
100295B	VET 7-10 BLACK EPDM	●	1 000	halogen-free	7mm - 10mm	19	24	21	1mm - 4mm	5
100296B	VET 7-10 GREY EPDM	●	1 000	halogen-free	7mm - 10mm	19	24	21	1mm - 4mm	6
100703B	VET 7-10 GREY EPDM	●	1 000	halogen-free	7mm - 10mm	19	24	21	1mm - 4mm	5
100297B	VET 14-20 BLACK EPDM	●	500	halogen-free	14mm - 20mm	29	34	26	1mm - 4mm	12
100298B	VET 14-20 GREY EPDM	●	500	halogen-free	14mm - 20mm	29	34	26	1mm - 4mm	9
100707B	VET 14-20 GREY EPDM	●	500	halogen-free	14mm - 20mm	29	34	26	1mm - 4mm	10
100300B	VET 20-26 BLACK EPDM	●	500	halogen-free	20mm - 26mm	38	46	30	1mm - 4mm	20
100301B	VET 20-26 GREY EPDM	●	500	halogen-free	20mm - 26mm	38	46	30	1mm - 4mm	18
100709B	VET 20-26 GREY EPDM	●	500	halogen-free	20mm - 26mm	38	46	30	1mm - 4mm	19
100304B	VET 26-35 BLACK EPDM	●	200	halogen-free	26mm - 35mm	48	48	30	1mm - 4mm	32
100305B	VET 26-35 GREY EPDM	●	200	halogen-free	26mm - 35mm	48	48	30	1mm - 4mm	31
100710B	VET 26-35 GREY EPDM	●	200	halogen-free	26mm - 35mm	48	48	30	1mm - 4mm	34

T-GET




Advantages

- Fast and easy assembly
- Double sealing with high IP protection
- Suitable for both indoor and outdoor use
- Fit cut-out dimensions in mm

Technical Specifications

- IP rating: IP67
- Material: thermoplastic elastomer
- Colour: grey and black
- Self-extinguishing option available
- Material service temperature (unstressed): -40 °C...+100 °C

Dimensions



T-GET

Singlegates

Bulk
packed

Art.No.	Description	Packing code	Box size	Material Properties	Cable diameter	2	3	4	Plate thickness	Weight (g)
100722	T-GET 3-5 GREY	●	1 500	halogen-free	3mm - 5mm	12	19	21	1mm - 5mm	3
100723	T-GET 3-5 GREY UL 94 V-0	●	1 500	UL94 V-0, self-extinguishing	3mm - 5mm	12	19	21	1mm - 5mm	3
100724	T-GET 3-5 BLACK UL94 V-0	●	1 500	UL94 V-0, self-extinguishing	3mm - 5mm	12	19	21	1mm - 5mm	3
100725	T-GET 5-7 GREY	●	1 500	halogen-free	5mm - 7mm	16	23	22	1mm - 5mm	5
100726	T-GET 5-7 GREY UL94 V-0	●	1 500	UL94 V-0, self-extinguishing	5mm - 7mm	16	23	22	1mm - 5mm	5
100727	T-GET 5-7 BLACK UL94 V-0	●	1 500	UL94 V-0, self-extinguishing	5mm - 7mm	16	23	22	1mm - 5mm	5
100728	T-GET 7-10 GREY	●	1 000	halogen-free	7mm - 10mm	20	27	25	1mm - 5mm	6
100729	T-GET 7-10 GREY UL94 V-0	●	1 000	UL94 V-0, self-extinguishing	7mm - 10mm	20	27	25	1mm - 5mm	6
100730	T-GET 7-10 BLACK UL94 V-0	●	1 000	UL94 V-0, self-extinguishing	7mm - 10mm	20	27	25	1mm - 5mm	6
100731	T-GET 10-14 GREY	●	600	halogen-free	10mm - 14mm	26	32	25	1mm - 5mm	9
100732	T-GET 10-14 GREY UL94 V-0	●	600	UL94 V-0, self-extinguishing	10mm - 14mm	26	32	25	1mm - 5mm	9
100733	T-GET 10-14 BLACK UL94 V-0	●	600	UL94 V-0, self-extinguishing	10mm - 14mm	26	32	25	1mm - 5mm	9
100734	T-GET 14-20 GREY	●	400	halogen-free	14mm - 20mm	32	39	29	1mm - 5mm	13
100735	T-GET 14-20 GREY UL94 V-0	●	400	UL94 V-0, self-extinguishing	14mm - 20mm	32	39	29	1mm - 5mm	13
100736	T-GET 14-20 BLACK UL94 V-0	●	400	UL94 V-0, self-extinguishing	14mm - 20mm	32	39	29	1mm - 5mm	13
100737	T-GET 20-26 GREY	●	250	halogen-free	20mm - 26mm	40	46	33	1mm - 5mm	18
100183	T-GET 20-26 GREY UL94 V-0	●	250	UL94 V-0, self-extinguishing	20mm - 26mm	40	46	33	1mm - 5mm	18
100184	T-GET 20-26 BLACK UL94 V-0	●	250	UL94 V-0, self-extinguishing	20mm - 26mm	40	46	33	1mm - 5mm	18
100738	T-GET 26-35 GREY	●	140	halogen-free	26mm - 35mm	50	57	40	1mm - 5mm	27
100739	T-GET 26-35 GREY UL94 V-0	●	140	UL94 V-0, self-extinguishing	26mm - 35mm	50	57	40	1mm - 5mm	27
100740	T-GET 26-35 BLACK UL94 V-0	●	140	UL94 V-0, self-extinguishing	26mm - 35mm	50	57	40	1mm - 5mm	27
103924	T-GET 30-45 GREY	●	175	halogen-free	30mm - 45mm	60	69	61	1mm - 5mm	53
100741	T-GET 30-45 GREY UL94 V-0	●	175	UL94 V-0, self-extinguishing	30mm - 45mm	60	69	61	1mm - 5mm	53
100185	T-GET 30-45 BLACK UL94 V-0	●	175	UL94 V-0, self-extinguishing	30mm - 45mm	60	69	61	1mm - 5mm	53
100743	T-GET 40-60 BLACK UL94 V-0	●	80	UL94 V-0, self-extinguishing	40mm - 60mm	80	89	79	1.2mm - 5.2mm	112

GET




Advantages

- Fast and easy assembly
- Double sealing with high IP protection
- Suitable for both indoor and outdoor use
- Fit cut-out dimensions in mm

Technical Specifications

- IP rating: IP67
- Material: EPDM rubber
- Colour: grey and black
- Material service temperature (unstressed): -40 °C...+100 °C

Dimensions



GET

Singlegates

B

Single
packed

Art.No.	Description	Packing code	Box size	Material Properties	Cable diameter	2	3	4	Plate thickness	Weight (g)
100589B	GET 3-5 BLACK EPDM	●	1 000	halogen-free	3mm - 5mm	12,2	19	18,5	1,3 - 5mm	3
100590B	GET 3-5 GREY EPDM	●	1 000	halogen-free	3mm - 5mm	12,2	19	18,5	1,3 - 5mm	3
100587B	GET 5-7 BLACK EPDM	●	1 000	halogen-free	5mm - 7mm	16,2	23	18,5	1,3 - 5mm	4
100231B	GET 5-7 GREY EPDM	●	1 000	halogen-free	5mm - 7mm	16,2	23	18,5	1,3 - 5mm	5
100578B	GET 7-10 BLACK EPDM	●	1 000	halogen-free	7mm - 10mm	20,2	27	19,5	1,3 - 5mm	6
100226B	GET 7-10 GREY EPDM	●	1 000	halogen-free	7mm - 10mm	20,2	27	19,5	1,3 - 5mm	6
100574B	GET 10-14 BLACK EPDM	●	1 000	halogen-free	10mm - 14mm	25,2	32	19,5	1,3 - 5mm	8
100167B	GET 10-14 GREY EPDM	●	1 000	halogen-free	10mm - 14mm	25,2	32	19,5	1,3 - 5mm	9
100227B	GET 14-20 BLACK EPDM	●	500	halogen-free	14mm - 20mm	32,2	39	21,5	1,3 - 5mm	11
100228B	GET 14-20 GREY EPDM	●	500	halogen-free	14mm - 20mm	32,2	39	21,5	1,3 - 5mm	12
100583B	GET 20-26 BLACK EPDM	●	500	halogen-free	20mm - 26mm	40,2	47	24	1,3 - 5mm	16
100584B	GET 20-26 GREY EPDM	●	500	halogen-free	20mm - 26mm	40,2	47	24	1,3 - 5mm	17
100229B	GET 26-35 BLACK EPDM	●	200	halogen-free	26mm - 35mm	50,2	58	30	1,3 - 5mm	27
100230B	GET 26-35 GREY	●	200	halogen-free	26mm - 35mm	50,2	58	30	1,3 - 5mm	29
100223B	GET 30-45 BLACK EPDM	●	100	halogen-free	30mm - 45mm	60,2	69	45	1,3 - 5mm	52
100224B	GET 30-45 GREY EPDM	●	100	halogen-free	30mm - 45mm	60,2	69	45	1,3 - 5mm	58
100573B	GET40-60 BLACK EPDM	●	50	halogen-free	40mm - 60mm	80,2	90	60	1,3 - 5mm	97
100225B	GET 40-60 GREY EPDM	●	50	halogen-free	40mm - 60mm	80,2	90	60	1,3 - 5mm	116

T-GD




Advantages

- Fast and easy assembly
- Suitable for both indoor and outdoor use
- Fit PG cut-out dimensions

Technical Specifications

- IP rating: IP54
- Material: thermoplastic elastomer
- Colour: black
- Made of self-extinguishing material
- Material service temperature (unstressed): -40 °C...+100 °C

Dimensions

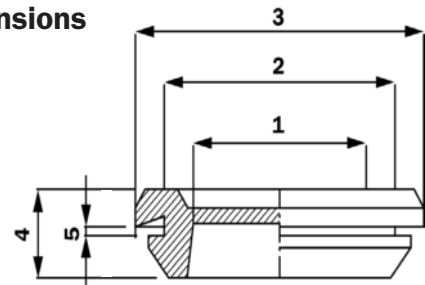

T-GD

Singlegates

PG cut-out

Bulk
packed

Art.No.	Description	Packing code	Material Properties	1 Cable diameter	2	3	4	Plate thickness	Weight (g)
100174	T-GD 9 PG BLACK	●	UL94 V-0, self-extinguishing	1mm - 9mm	15,5	20	7	1mm - 2mm	1
100175	T-GD 11 PG BLACK	●	UL94 V-0, self-extinguishing	1mm - 11mm	18,5	23	7	1mm - 2mm	2
100176	T-GD 13,5 PG BLACK	●	UL94 V-0, self-extinguishing	1mm - 13.5mm	20,5	25	7	1mm - 2mm	2
100177	T-GD 16 PG BLACK	●	UL94 V-0, self-extinguishing	1mm - 16mm	22,5	28	7	1mm - 2mm	3
100178	T-GD 21 PG BLACK	●	UL94 V-0, self-extinguishing	1mm - 21mm	28	35	9	1mm - 2mm	5
100179	T-GD 29 PG BLACK	●	UL94 V-0, self-extinguishing	1mm - 29mm	37	44	9.5	1mm - 2mm	8
100180	T-GD 36 PG BLACK	●	UL94 V-0, self-extinguishing	1mm - 36mm	47	54	12	1.5mm - 3mm	15
100181	T-GD 48 PG BLACK	●	UL94 V-0, self-extinguishing	1mm - 948mm	60	68	12	1.5mm - 3mm	23
100182	T-GD 53 PG BLACK	●	UL94 V-0, self-extinguishing	1mm - 53mm	64	75	12	1.5mm - 3mm	25
100721	T-GD 69 PG BLACK	●	UL94 V-0, self-extinguishing	1mm - 69mm	80	90	12	1.5mm - 3mm	33

T-GDM


Advantages

- Fast and easy assembly
- Suitable for both indoor and outdoor use
- Fit cut-out dimensions in mm

Technical Specifications

- IP rating: IP54
- Material: thermoplastic elastomer
- Colour: black
- Made of self-extinguishing material
- Material service temperature (unstressed):
-40 °C...+100 °C

Dimensions

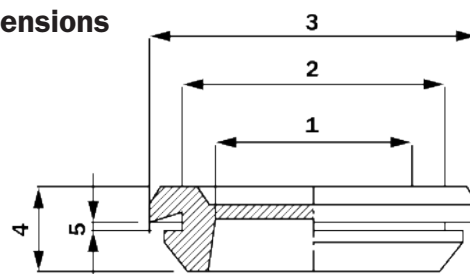

T-GDM

Singlegates

MM cut-out

Bulk
packed

Art.No.	Description	Packing code	Material Properties	1 Cable diameter	2	3	4	Plate thickness	Weight (g)
103665	T-GDM 9 MM BLACK	●	UL94 V-0, self-extinguishing	1mm - 9mm	12,2	17	7	1mm - 2mm	1
103933	T-GDM 11 MM BLACK	●	UL94 V-0, self-extinguishing	1mm - 11mm	16,2	21	7	1mm - 2mm	2
100199	T-GDM 13,5 MM BLACK	●	UL94 V-0, self-extinguishing	1mm - 13.5mm	20,2	25	7	1mm - 2mm	2
100200	T-GDM 16 MM BLACK	●	UL94 V-0, self-extinguishing	1mm - 16mm	25,2	32	7	1mm - 2mm	4
102342	T-GDM 21 MM BLACK	●	UL94 V-0, self-extinguishing	1mm - 21mm	32,2	40	9	1mm - 2mm	7
103523	T-GDM 29 MM BLACK	●	UL94 V-0, self-extinguishing	1mm - 29mm	40,2	48	10	1mm - 2mm	8
104019	T-GDM 36 MM BLACK	●	UL94 V-0, self-extinguishing	1mm - 36mm	50,2	58	12	1.5mm - 3mm	20
104021	T-GDM 48 MM BLACK	●	UL94 V-0, self-extinguishing	1mm - 48mm	60,2	68	12	1.5mm - 3mm	23
104022	T-GDM 53 MM BLACK	●	UL94 V-0, self-extinguishing	1mm - 53mm	70,2	81	12	1.5mm - 3mm	37
104023	T-GDM 69 MM BLACK	●	UL94 V-0, self-extinguishing	1mm - 69mm	80,2	91	12	1.5mm - 3mm	33

T-RGDM




Advantages

- Fast and easy assembly
- Sealing rings can easily be pulled off without extra tools
- Suitable for both indoor and outdoor use
- Fit M40, M50 or M60 cut-out

Technical Specifications

- IP rating: IP54
- Material: thermoplastic elastomer
- Colour: grey and black
- Self-extinguishing option available
- Material service temperature (unstressed): -40 °C...+100 °C

Dimensions

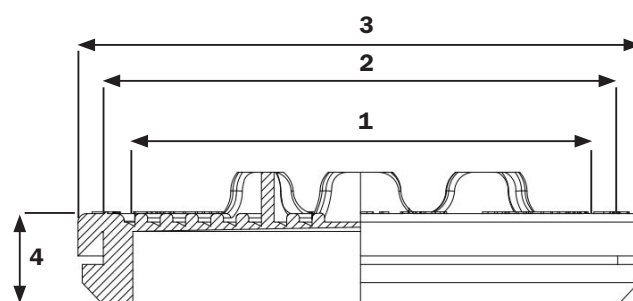


T-RGDM

Singlegates

Fast and easy
assemblyBulk
packed

Art.No.	Description	Packing code	Material Properties	1 Cable diameter	2	3	4	Plate thickness	Weight (g)
107166	T-RGDM 40 BLACK V-0	●	UL94 V-0, self-extinguishing , halogen-free	10mm - 34mm	40,2	47	11	1 - 3.5 mm	11
108421	T-RGDM 40 LIGHT GREY V-0	●	UL94 V-0, self-extinguishing , halogen-free	10mm - 34mm	40,2	47	11	1 - 3.5 mm	10
106995	T-RGDM 50 BLACK V-0	●	UL94 V-0, self-extinguishing , halogen-free	12mm - 44mm	50,2	57	11	1 - 3.5 mm	13
108422	T-RGDM 50 LIGHT GREY V-0	●	UL94 V-0, self-extinguishing , halogen-free	12mm - 44mm	50,2	57	11	1 - 3.5 mm	13
107167	T-RGDM 60 BLACK V-0	●	UL94 V-0, self-extinguishing , halogen-free	12mm - 54mm	60,2	67	11	1 - 3.5 mm	16
108423	T-RGDM 60 LIGHT GREY V-0	●	UL94 V-0, self-extinguishing , halogen-free	12mm - 54mm	60,2	67	11	1 - 3.5 mm	16

MGD

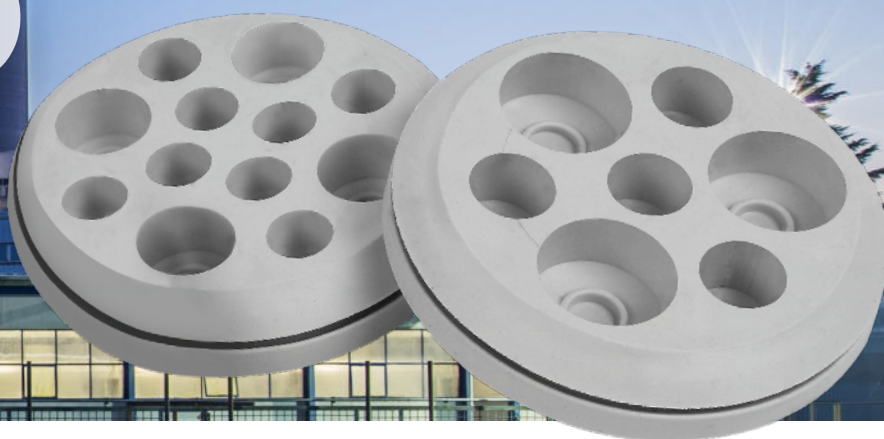

Advantages

- Fast and easy assembly
- Suitable for both indoor and outdoor use
- Fit M50 cut-out

Technical Specifications

- IP rating: IP54
- Material: EPDM rubber
- Colour: light grey
- Material service temperature (unstressed):
-40 °C...+100 °C

Installation Range M-GD 50-12 (Ø)

8 x 1mm - 9mm
4 x 1mm - 13mm


Total of 12 cable

Installation Range M-GD 50-7 (Ø)

4 x 1mm - 10mm
3 x 1mm - 16mm

Total of 7 cable

Dimensions of MGD

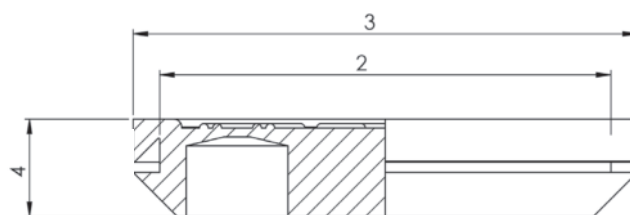

MGD

Singlegates

Bulk packed
100 pcs/boxBulk
packed

Art.No.	Description	Packing code	Material Properties	2	3	4	Weight (g)
106612	M-GD 50-12 (8 x 9 MM / 4 x 13 MM)	●	halogen-free	51	57	11	20
106613	M-GD 50-7 (4 x 10 MM / 3 x 16 MM)	●	halogen-free	51	57	11	19

M 20-80




Advantages

- Suitable for cable diameters up to 80 mm
- Suitable for both indoor and outdoor use

Technical Specifications

- Material: thermoplastic elastomer
- Colour: black and grey
- Self-extinguishing option available
- Material service temperature (unstressed): -40 °C...+100 °C

Dimensions of M 20-80

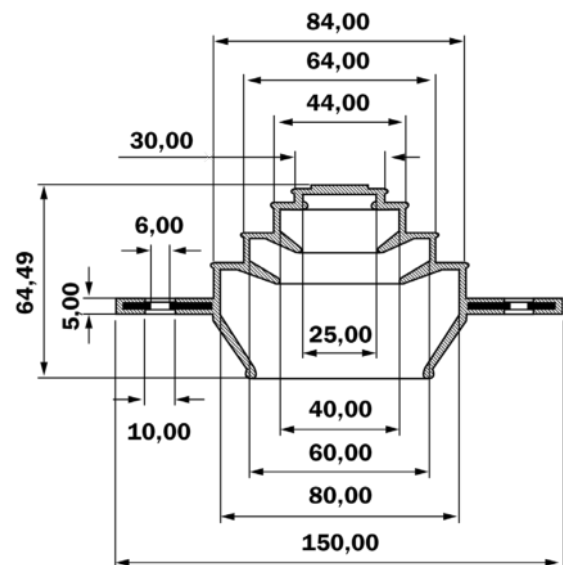

M 20-80

Singlegates

Bulk packed
50 pcs/boxBulk
packed

Art.No.	Description	Packing code	Material Properties	Weight (g)
104048	M 20-80 GREY	●	halogen-free	270
104049	M 20-80 LIGHT GREY UL94 V-0	●	UL94 V-0, self-extinguishing	270
101035	M 20-80 BLACK UL94 V-0	●	UL94 V-0, self-extinguishing	270